VIBRATORY SPREADER FEEDER


INNOVATION iN ACTION

The vibratory spreader feeder spreads bulk material **evenly across the full width** of the downstream equipment – a suspended magnet, drum magnet or eddy current separator – and prevents clumping and blockages.

Capacity **up to 400 m³/h**. Three drive types with fixed or **continuously adjustable output**; open, enclosed or **dust-tight** versions.

Replaceable wear-resistant liners in several designs; optionally weighing systems, control gates, control units and sensors.

We supply the entire infeed section of the line – feeder, magnet, drum, ECS and detector – from a single source!

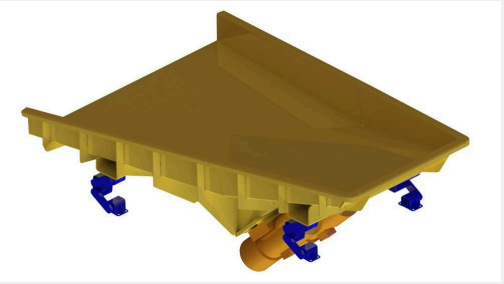

CAPACITY	DRIVE	VERSIONS	MATERIAL TESTING
up to 400 m³/h	3 types, continuously adjustable	open, enclosed, dust-tight	within 3 days free of charge

FUNCTION	• Even burden ahead of the separator – better capture of ferrous and non-ferrous metals • No clumping or blockages under the silo or hopper
TECHNOLOGICAL INNOVATIONS	• Three drive types, fixed or continuously adjustable output • Replaceable wear-resistant liners – protecting the trough from abrasive material • Dust-tight version for a clean plant environment
ACCESSORIES	• Weighing systems, control gates, control units, sensors
INTEGRATION	• Feeder → overband magnet → drum → ECS → detector from one supplier • Downstream separators from SOLLAU's own production in the Czech Republic
MATERIAL TESTING	• Free test of spreading and downstream separation on your material within 3 days

HOW WILL WE LOOK AFTER YOU?

1. We visit your site

2. We measure up and design

3. We build to order

4. We install

5. We commission and train

6. We provide authorised service

SOLLAU S.R.O.
Hřivínův Újezd 212 | 763 07 Velký Ořechov | Česká republika
Tel.: +420 576 013 873 | E-mail: info@sollau.cz
Company Reg. No.: 29261759 | VAT No.: CZ29261759

WWW.SOLLAU.COM